

KANEBRIDGE
CORPORATION

EXTREME STRENGTH


SUPREME SERVICE

Introducing **DOMESTIC** Grade-9 Fasteners




FEATURING HOLO-KROME®
Grade-9 Cap Screws

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available


GRADE 9

HEX CAP SCREWS (COARSE THREAD)

Manufactured From 8637 / 8640 / 8740 Medium Carbon Alloy Steel
Tensile Strength: 180,000 psi min. / Hardness: HRC 38-42

Part #	Size	Ctn Qty	Wght Lbs/C	Part #	Size	Ctn Qty	Wght Lbs/C
1408CH9	1/4-20X1/2	3,300	1.32	5016CH9	1/2-13X1	400	9.06
1412CH9	1/4-20X3/4	2,400	1.51	5024CH9	1/2-13X1 1/2	300	11.20
1416CH9	1/4-20X1	2,200	1.77	5028CH9	1/2-13X1 3/4	275	12.39
1420CH9	1/4-20X1 1/4	1,900	2.15	5032CH9	1/2-13X2	250	14.05
1424CH9	1/4-20X1 1/2	1,600	2.57	5036CH9	1/2-13X2 1/4	225	15.42
1428CH9	1/4-20X1 3/4	1,400	2.91	5040CH9	1/2-13X2 1/2	225	16.75
1432CH9	1/4-20X2	1,200	3.26	5048CH9	1/2-13X3	200	19.30
1436CH9	1/4-20X2 1/4	1,000	3.60	5052CH9	1/2-13X3 1/4	175	22.10
1440CH9	1/4-20X2 1/2	900	3.95	5056CH9	1/2-13X3 1/2	150	21.97
1444CH9	1/4-20X2 3/4	750	4.29	5064CH9	1/2-13X4	150	24.90
1448CH9	1/4-20X3	750	4.64	5072CH9	1/2-13X4 1/2	125	27.50
1456CH9	1/4-20X3 1/2	550	5.33	5080CH9	1/2-13X5	125	30.06
1464CH9	1/4-20X4	450	6.02	5088CH9	1/2-13X5 1/2	100	34.52
				5096CH9	1/2-13X6	100	35.49
3108CH9	5/16-18X1/2	1,650	2.08	50112CH9	1/2-13X7	90	41.25
3112CH9	5/16-18X3/4	1,650	2.47	5020CH9	1/2-13X1 1/4	375	10.22
3116CH9	5/16-18X1	1,400	2.89				
3120CH9	5/16-18X1 1/4	1,100	3.41	6224CH9	5/8-11X1 1/2	200	19.30
3124CH9	5/16-18X1 1/2	1,000	3.90	6228CH9	5/8-11X1 3/4	175	21.60
3128CH9	5/16-18X1 3/4	1,400	4.38	6232CH9	5/8-11X2	175	23.40
3132CH9	5/16-18X2	800	4.95	6236CH9	5/8-11X2 1/4	150	25.64
3136CH9	5/16-18X2 1/4	700	5.42	6240CH9	5/8-11X2 1/2	125	27.71
3140CH9	5/16-18X2 1/2	800	6.01	6244CH9	5/8-11X2 3/4	125	29.93
3148CH9	5/16-18X3	500	7.33	6248CH9	5/8-11X3	100	32.07
3156CH9	5/16-18X3 1/2	450	8.40	6256CH9	5/8-11X3 1/2	100	36.36
3164CH9	5/16-18X4	400	9.20	6264CH9	5/8-11X4	90	40.45
				6272CH9	5/8-11X4 1/2	80	44.50
3712CH9	3/8-16X3/4	1,100	3.73	6280CH9	5/8-11X5	75	48.75
3716CH9	3/8-16X1	900	4.32	6288CH9	5/8-11X5 1/2	70	54.64
3720CH9	3/8-16X1 1/4	800	4.93	6296CH9	5/8-11X6	65	58.95
3724CH9	3/8-16X1 1/2	675	5.70	62112CH9	5/8-11X7	55	68.52
3728CH9	3/8-16X1 3/4	600	6.59	62128CH9	5/8-11X8	50	74.55
3732CH9	3/8-16X2	550	7.25				
3736CH9	3/8-16X2 1/4	450	8.32	7520CH9	3/4-10X1 1/4	140	28.80
3740CH9	3/8-16X2 1/2	400	9.09	7524CH9	3/4-10X1 1/2	125	32.50
3744CH9	3/8-16X2 3/4	400	9.87	7528CH9	3/4-10X1 3/4	120	33.76
3748CH9	3/8-16X3	325	10.40	7532CH9	3/4-10X2	100	36.38
3756CH9	3/8-16X3 1/2	300	11.83	7536CH9	3/4-10X2 1/4	100	39.07
3764CH9	3/8-16X4	250	13.34	7540CH9	3/4-10X2 1/2	90	42.09
3780CH9	3/8-16X5	225	16.85	7544CH9	3/4-10X2 3/4	85	47.29
				7548CH9	3/4-10X3	80	48.05
4316CH9	7/16-14X1	650	6.36	7556CH9	3/4-10X3 1/2	70	54.50
4320CH9	7/16-14X1 1/4	550	6.85	7564CH9	3/4-10X4	60	60.50
4324CH9	7/16-14X1 1/2	500	7.87	7572CH9	3/4-10X4 1/2	55	69.06
4328CH9	7/16-14X1 3/4	450	8.89	7580CH9	3/4-10X5	45	75.28
4332CH9	7/16-14X2	400	9.88	7588CH9	3/4-10X5 1/2	45	81.50
4348CH9	7/16-14X3	275	14.62	7596CH9	3/4-10X6	40	85.23
				75112CH9	3/4-10X7	35	97.94
				75128CH9	3/4-10X8	35	109.84

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available

GRADE 9

HEX CAP SCREWS (FINE THREAD)

Manufactured From 8637 / 8640 / 8740 Medium Carbon Alloy Steel
Tensile Strength: 180,000 psi min. / Hardness: HRC 38-42

Part #	Size	Ctn Qty	Wght Lbs/C	Part #	Size	Ctn Qty	Wght Lbs/C
1508CH9	1/4-28X1/2	3,300	1.37	3208CH9	5/16-24X1/2	1,800	2.13
1512CH9	1/4-28X3/4	2,400	1.65	3212CH9	5/16-24X3/4	1,650	2.55
1516CH9	1/4-28X1	2,200	1.87	3216CH9	5/16-24X1	1,400	2.99
1520CH9	1/4-28X1 1/4	1,900	2.31	3220CH9	5/16-24X1 1/4	1,100	3.52
1524CH9	1/4-28X1 1/2	1,600	2.66	3224CH9	5/16-24X1 1/2	1,000	4.11
1532CH9	1/4-28X2	1,200	3.35	3232CH9	5/16-24X2	800	5.10
1540CH9	1/4-28X2 1/2	900	4.04				
1548CH9	1/4-28X3/4	750	4.73	3812CH9	3/8-24X3/4	1,100	3.83
				3816CH9	3/8-24X1	900	4.57
				3820CH9	3/8-24X1 1/4	800	5.40
				3824CH9	3/8-24X1 1/2	675	6.18
				3832CH9	3/8-24X2	550	7.73

Bolts Tensile Strength
180,000 PSI minimum

Nuts Proof Load
180,000 PSI minimum

Durable Coating
1,000-hour Corrosion
Resistance-Rating for All Items

- FREE -

Manufacturer's Certifications Available

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available

USS THRU-HARDENED FLAT WASHERS FOR GRADE 9 APPLICATIONS

Nominal dimensions to ASME B18.21.1 / DFAR-Compliant
Carbon or Alloy Steel / Hardness: Rockwell C38-45

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
14WUSS9	1/4	6,200	8.20	50WUSS9	1/2	1,100	22.30
31WUSS9	5/16	4,200	8.30	62WUSS9	5/8	625	89.10
37WUSS9	3/8	3,300	8.50	75WUSS9	3/4	475	114.50
43WUSS9	7/16	1,800	15.90				

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available

TOP LOCK HEX NUTS, GRADE 9 (COARSE THREAD)

Prevailing Torque to IFI 100/107 Grade-C / DFAR-Compliant
Medium Carbon or Alloy Steel / Proof Load: 180,000 psi.
Hardness: HRC 32-38 (1/4 thru 5/8" diams); HRC 35-40 (3/4-1.5" diams)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
14NO9	1/4-20	7,500	7.80	50NO9	1/2-13	1,400	45.30
31NO9	5/16-18	5,500	10.60	62NO9	5/8-11	650	68.40
37NO9	3/8-16	3,750	15.40	75NO9	3/4-10	350	117.00
43NO9	7/16-14	2,250	26.90				

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available

SAE THRU-HARDENED FLAT WASHERS FOR GRADE 9 APPLICATIONS

Nominal dimensions to ASME B18.21.1 / DFAR-Compliant
Carbon or Alloy Steel / Hardness: Rockwell C38-45

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
14WSAE9	1/4	6,200	5.30	50WSAE9	1/2	1,100	22.00
31WSAE9	5/16	4,200	6.20	62WSAE9	5/8	625	38.50
37WSAE9	3/8	3,300	8.50	75WSAE9	3/4	475	46.50
43WSAE9	7/16	1,800	15.80				

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available

TOP LOCK HEX NUTS, GRADE 9 (FINE THREAD)

Prevailing Torque to IFI 100/107 Grade-C / DFAR-Compliant
Medium Carbon or Alloy Steel / Proof Load: 180,000 psi.
Hardness: HRC 32-38 (1/4 thru 5/8" diams); HRC 35-40 (3/4-1.5" diams)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
15NO9	1/4-28	7,500	7.80	38NO9	3/8-24	3,750	15.40
32NO9	5/16-24	5,500	10.60				

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available

MADE IN U.S.A. FINISHED HEX GRADE 9 NUTS (COARSE THREAD)

Manufactured to ASME B18.2.2 dimensions / DFAR-Compliant
Medium Carbon Steel or Alloy Steel / Proof Load: 180,000 psi
Hardness: HRC 32-38 (1/4 thru 5/8" diams); HRC 35-40 (3/4 & 7/8" diams)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
14NF9	1/4-20	6,000	7.40	50NF9	1/2-13	1,100	37.50
31NF9	5/16-18	4,000	11.00	62NF9	5/8-11	600	73.30
37NF9	3/8-16	3,000	16.00	75NF9	3/4-10	325	119.00
43NF9	7/16-14	1,600	28.40				

Steel EcoGuard™
1000-hour Gray/Silver
coating



100% Made in U.S.A.

Free Manufacturer's
Certifications Available

MADE IN U.S.A. FINISHED HEX GRADE 9 NUTS (FINE THREAD)

Manufactured to ASME B18.2.2 dimensions / DFAR-Compliant
Medium Carbon Steel or Alloy Steel / Proof Load: 180,000 psi
Hardness: HRC 32-38 (1/4 thru 5/8" diams); HRC 35-40 (3/4 & 7/8" diams)


Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
15NF9	1/4-28	6,000	7.40	38NF9	3/8-24	3,000	16.00
32NF9	5/16-24	4,000	11.00				

All Parts Are


100%

U.S. Made!

Same-Day
Shipping!

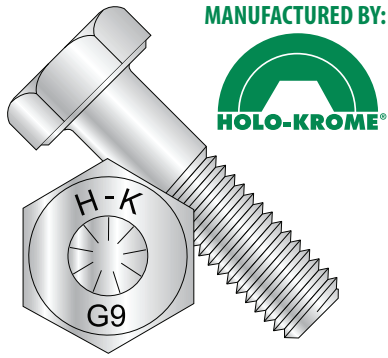


HEX CAP SCREWS
Coarse & Fine Thread

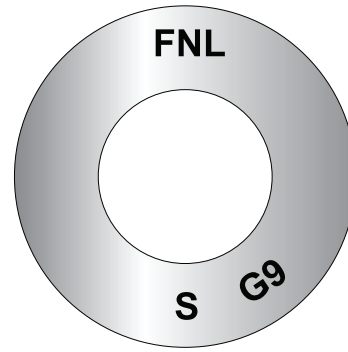

THRU-HARDENED WASHERS
USS & SAE Standards



FINISHED HEX NUTS
Coarse & Fine Thread

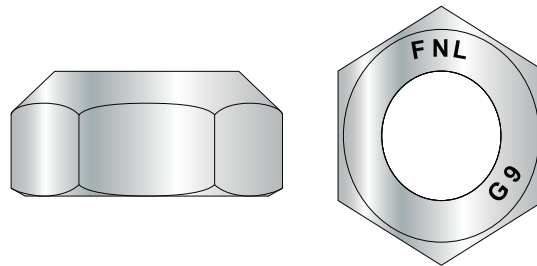

TOP LOCK NUTS
Coarse & Fine Thread



T: (800) 222-9221 sales@kanebridge.com

F: (201) 337-2301 www.kanebridge.com